



On the Ground


Article 22

NH Energy Code


■ Insulation.

- Maximum window U-.35
- Ceiling insulation R- 49
- Wall Insulation R- 21
- Floor Insulation R- 21
- Basement wall insulation R- 11
- Slab Insulation 4' down R- 13

Windows

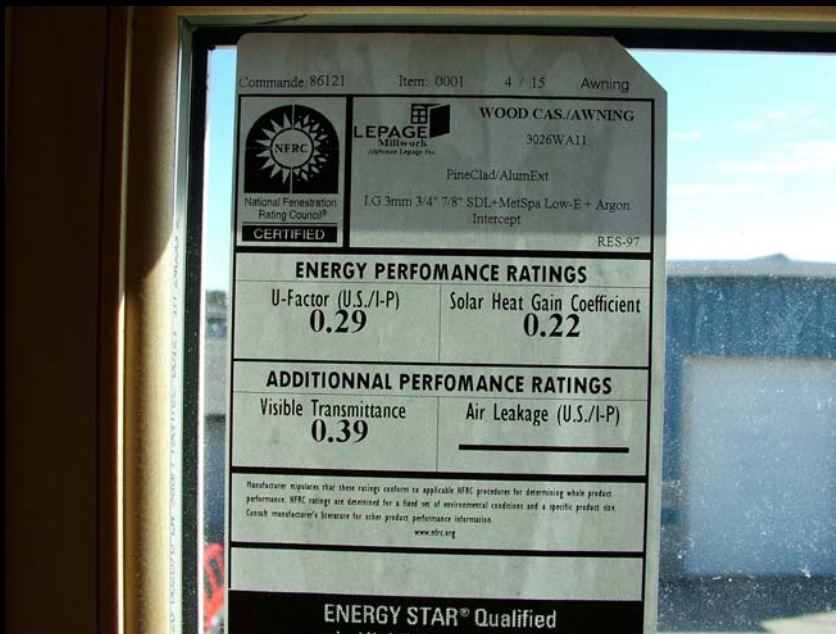

Heating

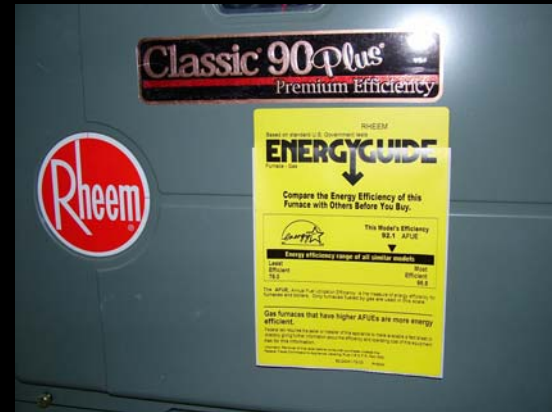

HVAC Ducts



Wood Heat



Site reuse and recycling



Exterior Insulation



Statistics

R-Value	21		
cedar shake	0.77		
film	0.68		
tyvek	0.17		
plywood	0.63		
5 1/2 inch insulation	19		
foil faced polyisocyanurate	6.5	U-Value Max	0.35
wall board	0.56	Windows	0.29
Total	28.3	Low E Argon Double Pane	

Statistics

Lighting

Energy Star

Air Conditioners

Energy Star

Furnaces

Energy Star

VE

4 Furnaces vs. 1

Placement Orientation 1

Regional materials 2

Site recycling location 1

Construction waste 2

Wood heat

Envelope 3

High efficiency redundant
furnaces

HVAC 4

Duct insulation

Reduced Lighting 1

Internal duct system

Site Recycling - Post construction 1

Required: 10

Total 15